QUICKSTART

Puzzi 10/1 - Puzzi 10/2






-WARNING

These are only brief instructions! Please read the operating instructions accompanying the appliance prior to using or maintaining the appliance.

The non-compliance with the operating and safety instructions may lead to damage of the appliance and to risks for the operator and other persons.


Start up

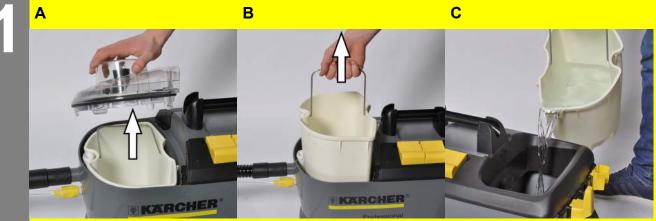

- Remove the cover of the wastewater tank.
- Remove waste water tank.
- Fill detergent solution into the fresh water reservoir. The fill level must not exceed the "MAX" mark.

Operation



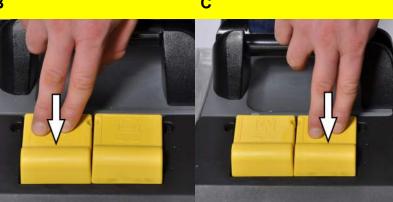


Turning on the Appliance

- Plug in the mains plug.
- Press the suction switch to turn on the suction turbine.
- Press the spray switch to switch on the spray pump.



- A Operate the lever on the manifold in order to spray the cleaning solution. Run across the surface to be cleaned in overlapping paths. Pull the nozzle backwards (do not push).
- B Press the suction switch to turn on the suction turbine.
- C Press the spray switch to switch on the spray pump.

Finish operation

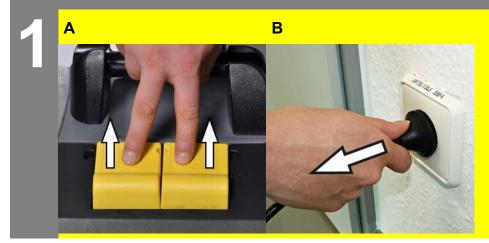

Turn off the appliance

- A Switch off the spray and suction switches.
- B Pull out the mains plug.

QUICKSTART




Finish operation


A B C

Empty wastewater container

- A If the dirt water reservoir is full, switch off the suction and spray switches.
- B Remove the lid.
- C Remove the wastewater container from the appliance and drain it.



- A Turn off the appliance.
- B Shortly activate the lever on bender to decrease the pressure.
- C Separate bender from the spray/suction hose.
 - Insert the suction hose into the fresh water reservoir.
 - Press the suction switch to turn on the suction turbine.

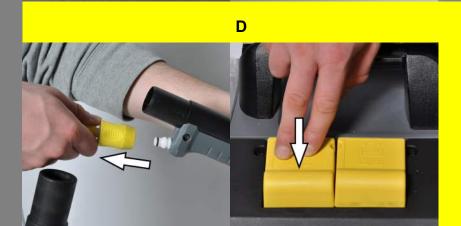

A



В

С



After each operation

- A Flush appliance.
- B Empty the wastewater container and clean it under running water.
- C Empty the fresh water reservoir.
 Suck the remaining fresh water out of the tank.
- D Clean the outside of the appliance with a damp cloth.
- Remove all water from the appliance prior to longer periods of non-use to avoid offensive odours.
- F Allow appliance to dry thoroughly: Remove or move lid sideways.

Transport

A For transport, place suction pipe on the carrying handle and place the spray/suction hose on top of the appliance.
Wind up the mains cable and hook it into the cable hook.

